


10 R Panel PC

Overview





TECHNICAL INFORMATION

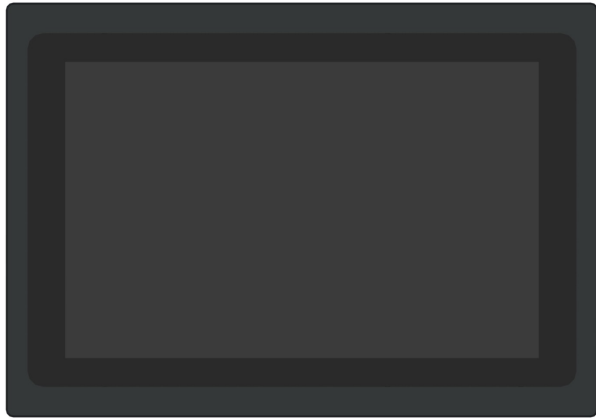

Display	10.1" 1280x800 (WXGA). Brightness: 300cd/m2, colors:16.7M, IPS-PRO, Lifetime: 30000 h (50% intensity decrease)
Touch	Capacitive PCAP
CPU	Rockchip RK3399 (6 core, 2 GHz)
RAM	2GB
Flash	32 GB High speed eMMC
Interfaces	USB 2.0 (2x), USB 3.0 (2x), 1x 1G ETHERNET, Micro USB (terminal)
Consumption	15W
Temperature	-20°C to 60°C (Operation), -20°C to 80°C (Storage), -20°C to 80°C (Transport)
Mechanical	Front IP65 in aluminium, backside IP20 in stainless steel, fanless, Weight: 1,3kg, VESA (100x100)
Environment	CE 24 VDC +-20% EN 61000-6-2 (immunity), EN 61000-6-4 (emission) 0°C ... +55°C -20°C ... +70°C 10%-90% @ 39°C, non-condensing
Software	Linux (Android)

Dimension

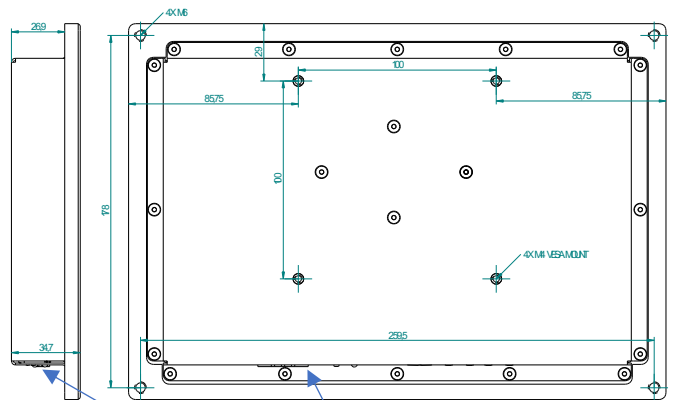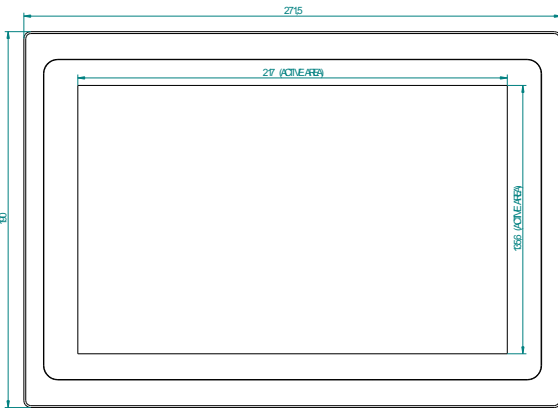

CONNECTORS, LEDS, BUTTONS

Connectors


POWER CONNECTOR (- | CHASIS | +), mating connector: Phoenix PN# 1777992




MICRO USB (TERMINAL) 1G ETHERNET USB 2.0 USB 3.0 PWR/HDD LED PWR&RESET

DataVision



 5. Května 1746/22, Prague, Czech Republic

 info@datavision.software

 +420 737 240 516

 www.datavision.software